


FOREST TECHNOLOGY

LASCO
www.lasco.at

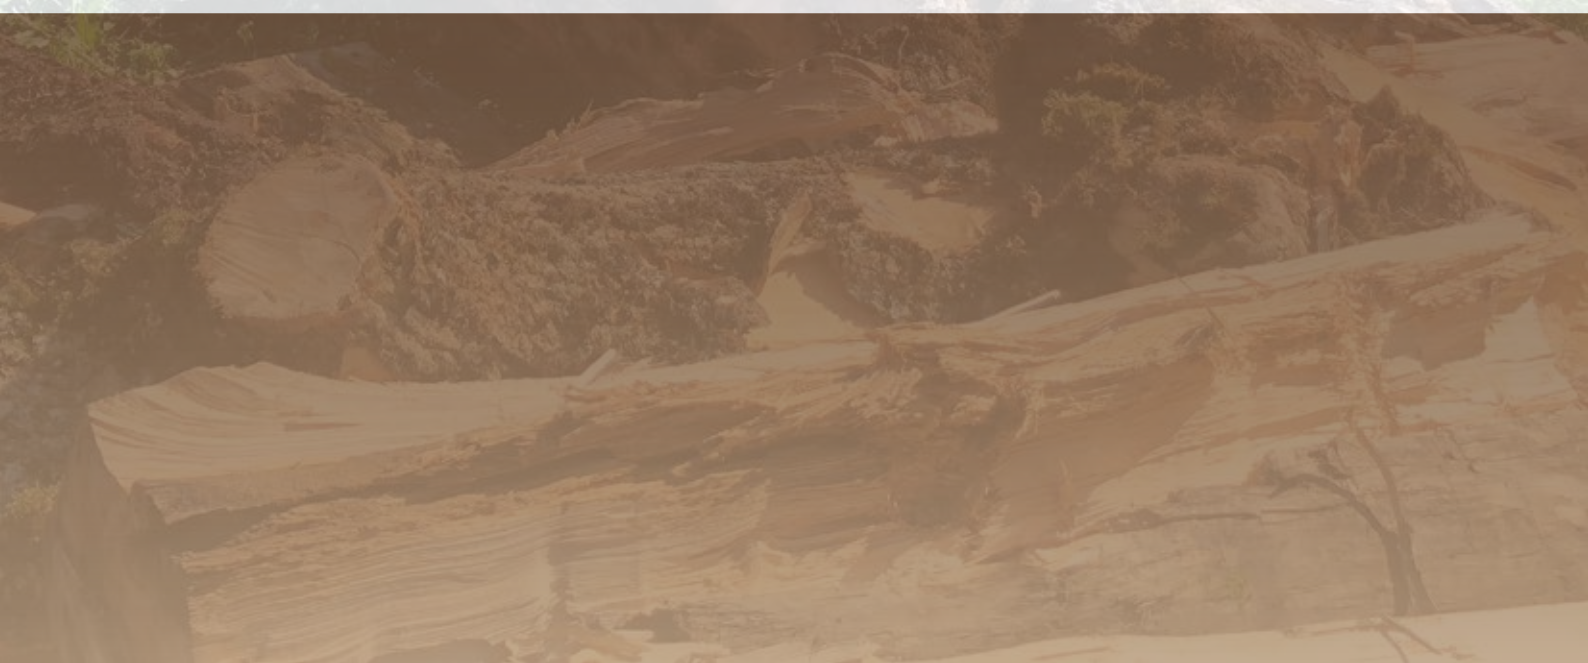

The LASCO logo is displayed in a bold, italicized, green font with a black outline.

www.lasco.at

The LASCO logo is shown on the red body of a wood splitter machine in a white-bordered box.

Photos, videos and configurations! Now online under:
www.kegelspalter.com/en

Buy cone splitters online!

For a decade, we develop and build cone splitters for splitting oversized woods. Meanwhile, our cone splitters are distributed all over the world, where they achieve great things!


[→Go to products](#)

Configure Your cone splitter online

[Configure Your cone splitter now!](#)

Your way to us:

LASCO Heutechnik GmbH
Lascostraße 1
A-4891 Pöndorf (near Salzburg)
Telefon: +43 (0)7684 / 21666-0
Fax: +43 (0)7684 / 21666-4
E-Mail: office@lasco.at
Web: www.lasco.at
www.kegelspalter.com

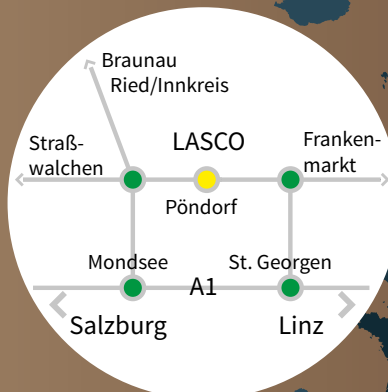

Contents

This is LASCO	03
Original LASCO Cone wood splitters	04
Technical Data	08
Cone wood splitter attachments	10
Cone wood splitters Pictures	12
Timber grabbers	14
Rotators	16
Popular accessory	18
LASCO Wood drying	19



This is LASCO

Since 1987, we construct and we sell quality machines that are now exported in the whole world as a family business in the heart of the Austrian hay region.

Our own research and development have resulted in recent years innovations, which has made us a leader in our product categories.

Together with our partner companies, research centers and partners we manage to bring customer requirements directly into the product line. As a result we can offer technically advanced devices, convincing with a good price performance ratio, reliability and functionality.

We are convinced that genuine innovations and ideas are created where they are needed - in practice. For this reason, we work very closely with our customers. Thus arose a remarkable range of products consisting of:

- Forest Technology
- Drying Technology
- Hay Technology
- Heating Technology

Our products are manufactured in over 18,000 m² of production and warehouse space. All spare parts from the last 30 years are kept in stock, thus eliminating irritating delays.

If we have piqued your interest with our products, please visit us in Internet at www.lasco.at or contact our staff by phone

Sincerely,

A handwritten signature in black ink, reading 'Johannes Landrichinger'.

Johannes Landrichinger



The simplest
and most economical
solution for
splitting large
timber and root
stumps!



Splitting and manipulating
in one operation!

LASCO CONE WOOD SPLITTER

Patent and trademark protected

The patented LASCO wood cone splitter is available in 30 types from single motored to twelve-motored versions.

It fits on almost any carrier vehicle with a hydraulic system (E.g. excavator, chipper, mini excavator, Hoftrac, tractor, timber crane, hay excavator, etc).

Through its particularly robust and compact design it has become a very helpful, reliable, and indispensable helper.

The Lasco wood splitter is ideal for forest cooperatives through its quick change systems and the bolted contact plate.

The large cone diameter makes knotty and twisted wood easy to split!



Facts:

- 30 different models
- 1 to 12 motored versions
- Connection to many machines
- Use with cone tip up or down
- High splitting performance
- Tested to 30 t excavator
- Oversized execution of all stress parts - very low maintenance costs



The threaded cone screws into the tree trunk and splits it open.



The advantages

Remarkable advantages can be found in all of our cone splitters. Benefits that accelerate your work significantly and make it substantially safer. The highest quality workmanship ensures low wear and operating costs.

own moulds

A significant advantage over conventional cone splitters is the way the drill cone is produced. We use our own moulds and can thus use special alloys. The total weight of the cone splitter is massively reduced by simultaneous higher quality and thus the operating lifetime significantly improved.

4-fold calorific value - great product range!

Our extensive model range of 1-12 motors guarantees that even the thickest and longest logs can be effortlessly split. Connection to any carrier vehicle with independent hydraulics is possible. Split and dried wood increases the calorific value 4-fold.

superior power transfer

The model-specific special motors and the splitter gearbox guarantee high power transmission. The extremely robust tapered spherical roller bearings ensure maximum longevity.

working that is easy on the machine

The cone splitter does the splitting of the wood - not the carrier machine. Suitably matched to the available oil and pressure performance, each carrier machine is transformed into a powerful splitting tool. Since the cone splitter is not, as used to be the case, connected to the tractor PTO, but carries out its work at a safe distance from the operator, one can reduce the risk of accidents to an absolute minimum.

Root stumps are no problem for the LASCO splitter



LASCO CONE SPLITTER



Material from the mining industry

Our cone splitters are wear resistant and low maintenance. We use the highest quality materials that are otherwise only used in underground mining (mining and tunnel construction).



This material quality makes contracting/rental possible. Thanks to the universal contact plate the cone splitter optimal for forest cooperatives.




Due to the wide product range, the LASCO cone splitter can be successfully used on almost every carrier vehicle with hydraulics.

LASCO CONE WOOD SPLITTER

Patent and trademark protected

Dimensions

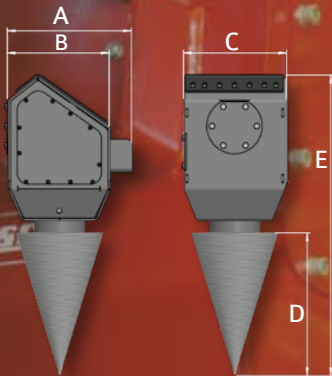

Both small forest managers and enterprise contractors rely on this proven and stable splitting technique. Over 8000 LASCO splitters throughout Europe, Canada and the United States have already established themselves in the market bringing maximum benefit and comfort to the forestry sector.

Roli 5.2/6.2	
A:	358 mm
B:	326 mm
C:	312 mm
D:	340 mm
E:	847 mm

Roli10.0	
A:	371 mm
B:	325 mm
C:	311 mm
D:	343 mm
E:	972 mm

Roli 10.0 K	
A:	371 mm
B:	325 mm
C:	311 mm
D:	465 mm
E:	1084 mm




M1 5.2/6.2K, M2 5.2/6.2k	
A:	445 mm
B:	345 mm
C:	361 mm
D:	489 mm
E:	1075 mm


M2 5.2/6.2 KS	
A:	445 mm
B:	345 mm
C:	365 mm
D:	644 mm
E:	1147 mm

M2 5.2/6.2 S, M3 5.2/6.2	
A:	560 mm
B:	460 mm
C:	465 mm
D:	644 mm
E:	1356 mm

M2 5.2/6.2 M, M3 5.2/6.2 M	
A:	575 mm
B:	475 mm
C:	475 mm
D:	489 mm
E:	1282 mm

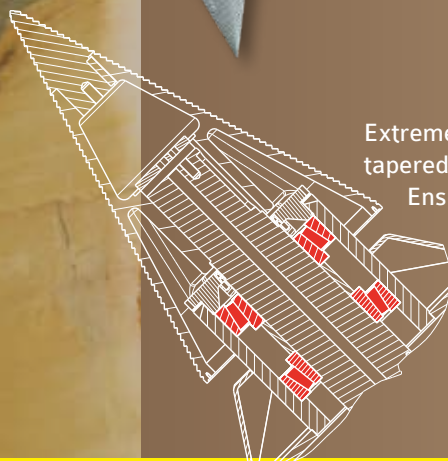

Extremely robust
tapered barrel roller bearings
Ensure maximum
durability.



Cone tips can be
easily replaced.


					Wood		
Model	Engine	Variant	Oil capacity	Typical application weight	Length	Ø	Weight
1-engined							
Roli	6.2		15 - 80 l/min	1,3 - 5,0 to.	200 cm	70 cm	approx. 90 kg.
	5.2		15 - 80 l/min	1,3 - 5,0 to.	200 cm	70 cm	approx. 90 kg.
	10.0		30 - 150 l/min	2,0 - 8,0 to.	300 cm	90 cm	approx. 120 kg.
	10.0	K	30 - 150 l/min	2,0 - 8,0 to.	300 cm	100 cm	approx. 130 kg.
M1	6.2	K	15 - 80 l/min	2,5 - 7,0 to.	300 cm	90 cm	approx. 135 kg.
	5.2	K	15 - 80 l/min	2,5 - 7,0 to.	300 cm	90 cm	approx. 135 kg.
2-engined							
M2	6.2	K	15 - 50 l/min	3,0 - 8,0 to.	400 cm	90 cm	approx. 135 kg.
	5.2	K	15 - 50 l/min	3,0 - 8,0 to.	400 cm	90 cm	approx. 135 kg.
	6.2	S	50 - 200 l/min	5,0 - 15,0 to.	400 cm	110 cm	approx. 320 kg.
	5.2	S	50 - 200 l/min	5,0 - 15,0 to.	400 cm	110 cm	approx. 320 kg.
3-engined							
M3	6.2	S	150 - 300 l/min	8,0 - 25,0 to.	500 cm	150 cm	approx. 400 kg.
	5.2	S	150 - 300 l/min	8,0 - 25,0 to.	500 cm	150 cm	approx. 400 kg.
4-engined							
M4	6.2	S XL	200 - 400 l/min	15,0 - 35,0 to.	700 cm	200 cm	approx. 600 kg.
	5.2	S XL	200 - 400 l/min	15,0 - 35,0 to.	700 cm	200 cm	approx. 600 kg.

Roli	Cone diameter 21cm, hexagonal rapid-change system
K	Cone diameter 28cm
S	Cone diameter 40cm
XL	Cone diameter 60 cm


Engine	max. working pressure
10.0	170 - 200 bar
6.2	170 - 220 bar
5.2	230 - 270 bar

Cone wood splitter attachments

- 1** LASCO Centrifugal Broom - for cleaning paving and sidewalks.
Wear-resistant and with replaceable brushes, 1200 mm Ø
- 2** LASCO Weed Brush - reliable removal of sharp weeds and wild growth,
40 brush heads, wear-resistant and replaceable brushes, 600 mm Ø
- 3** LASCO Rotary Cultivator - for decompaction work of soil or removing root plexuses,
Tines of high-strength steel, 500 mm Ø
- 4** LASCO Quick-Change System - no additional adapters are required
- 5** LASCO Stump Milling Cutter: 235 mm Ø, 9 hardened blades, which are applicable for both sides and regrindable
- 6** LASCO Auger with hard metal teeth from 60 mm up to 450 mm Ø

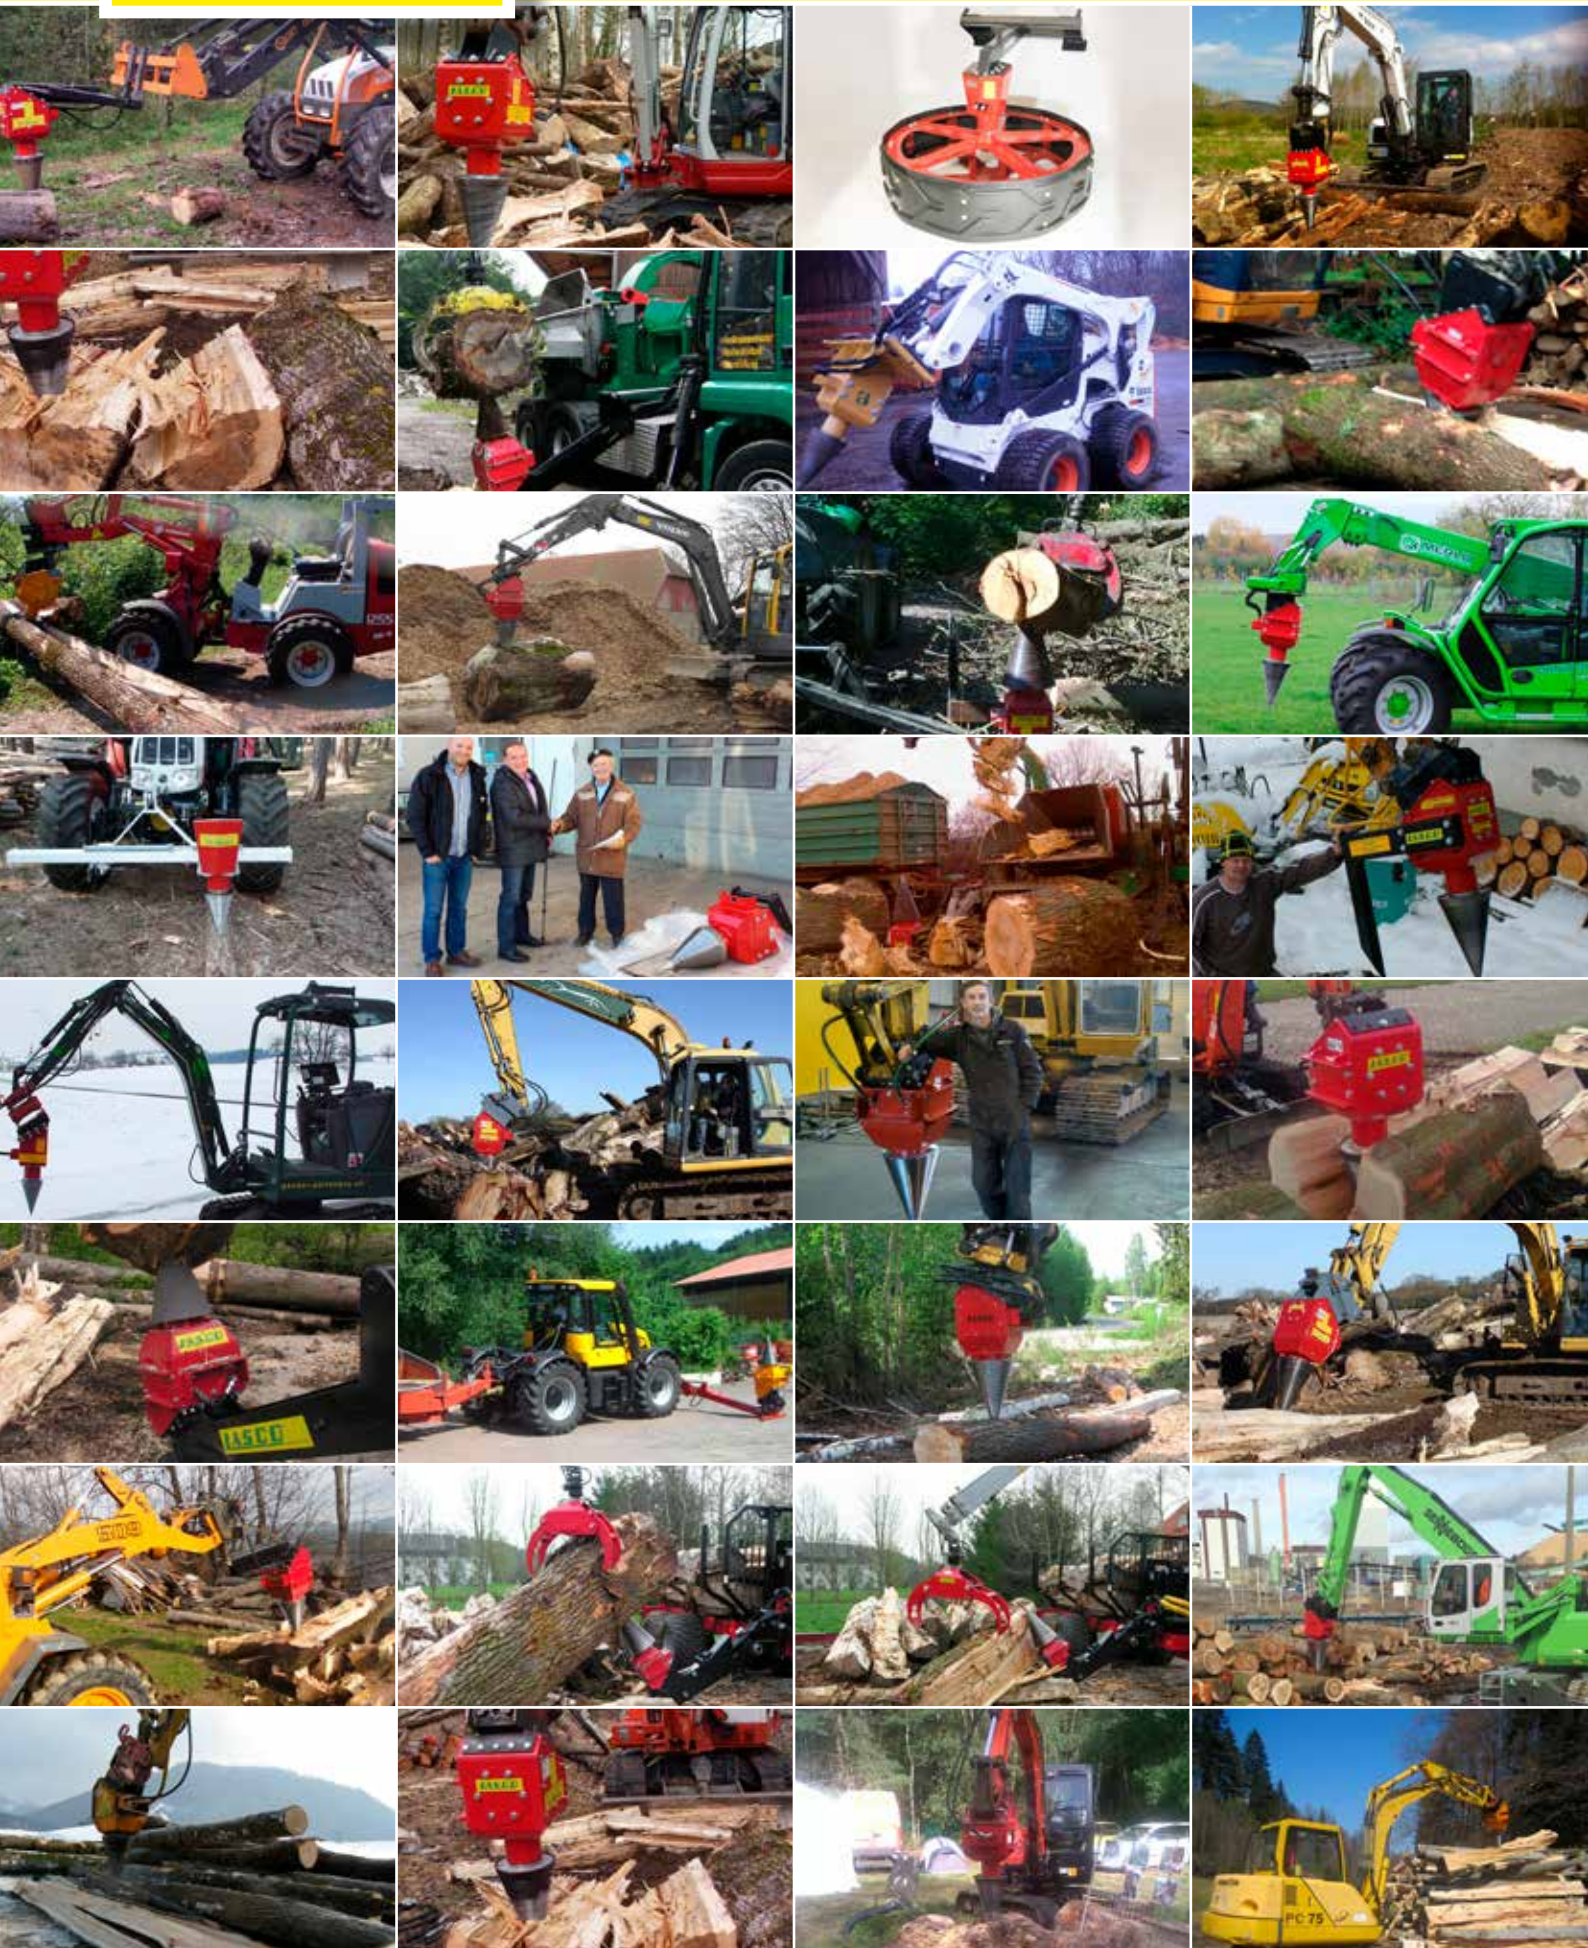


CONE WOOD SPLITTER PICTURES

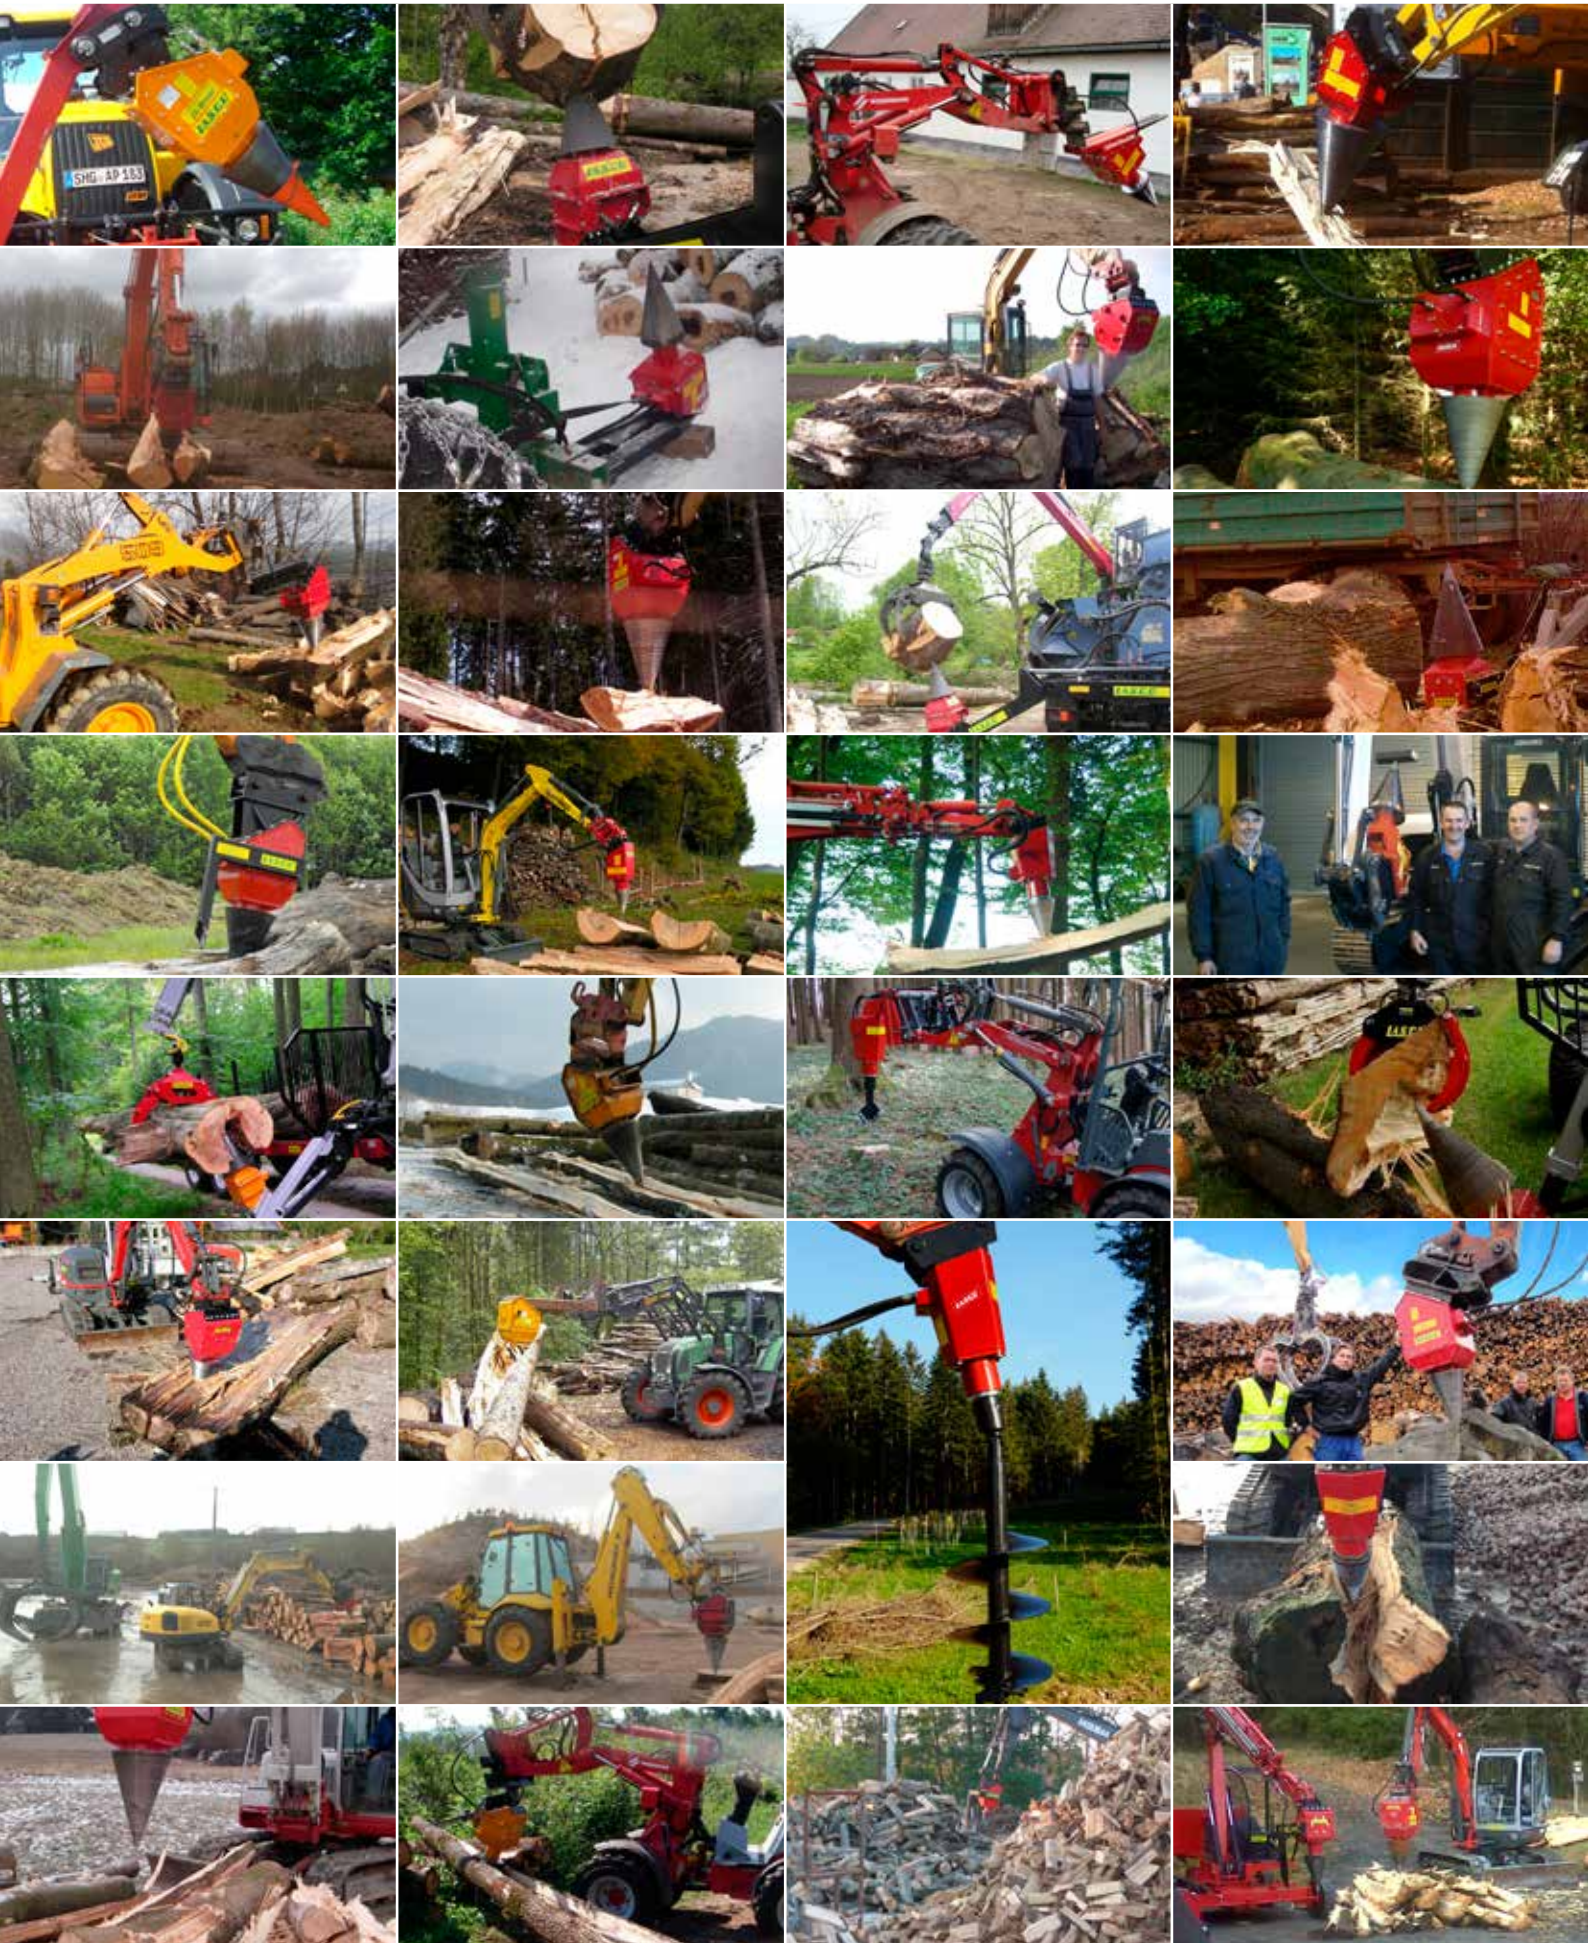



Grip	Weight	Cylinder clamping power
LA100-HZ	69 kg	80 kN
LA120-HZ	82 kg	105 kN
LA140-HZ	139 kg	105 kN
LA140-EZ	169 kg	105 kN
LA170-DZ	260 kg	155 kN
LA180-HZ	179 kg	105 kN
LA200-DZ	365 kg	155 kN

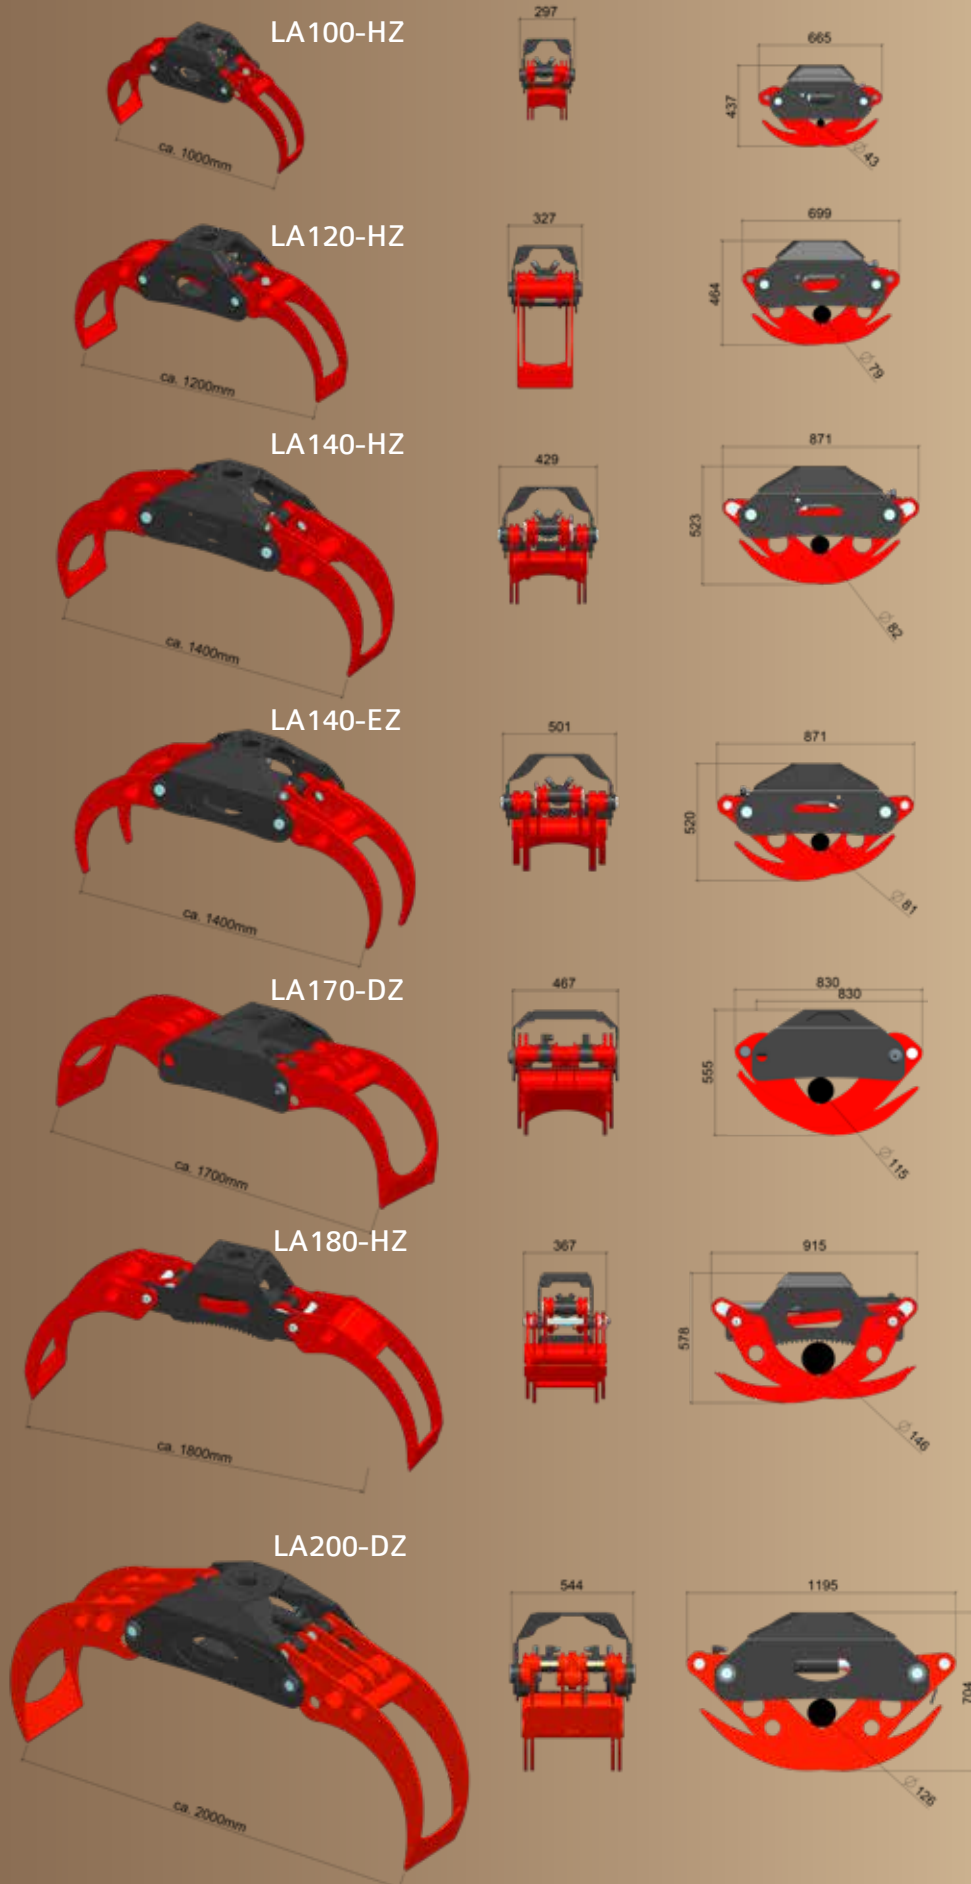

LASCO LOG GRIPS

Our log grips are made in modular design and over-dimensioning of all highly stressed parts (e.g. cylinder double, guide rods, bearings) and are extremely robust due to the use of HARDOX.

Grease nipple protection and powder coating isn't missing either! All log grips have a universal hole pattern for rotator connection. An adapter is available for bolted rotators!




isosceles opening

Hardox gripper jaws

LASCO LOG GRIP ACCESSORIES


Hole pattern

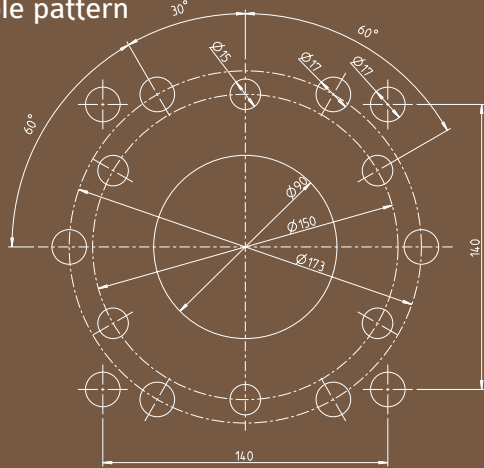

Pendulum adapter



Bolt adapter






Type	FHR 3.000 SF	GR 46	GR 463	GR 105 DB
Rotation range:	endless	endless	endless	endless
max axial load:	3,0 t. / 30 kN	4,5 t. / 45 kN	4,5 t. / 45 kN	10 t. / 100 kN
Optimal litre output:	20 l/min	20 l/min	20 l/min	30 l/min
Weight:	25 kg	23 kg	27 kg	62 kg
Attachment:	140 x 140 mm Bore 4 x Ø 17 mm	Bolzen Ø 59 mm	Bolt circle Ø 173 mm Bore 4 x Ø 17 mm	Bolt circle Ø 173 mm Bore 6 x Ø 17 mm
max. operating pressure:	250 bar	250 bar	250 bar	250 bar
Torque at 250 bar:	900 Nm	1200 Nm	1200 Nm	2700 Nm

LASCO ROTATORS

We see not only the machine itself but also the rotator used, as the core element of the equipment. This must be able to withstand our highest-standard requirements in both its reliability and quality of workmanship. As a defect in the rotator means much of the work will be delayed or even stopped, we rely on well-known, leading and reputable manufacturers from northern Europe.


The following rotators have passed our screening process and are ideal in combination with our carrier machines.

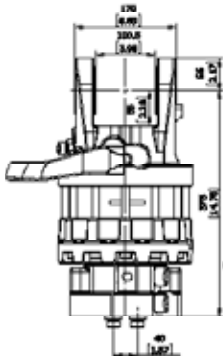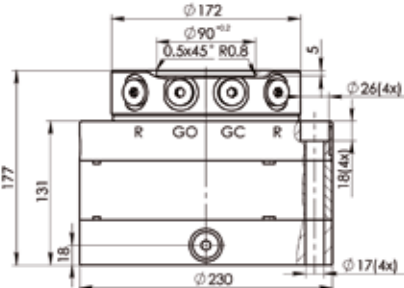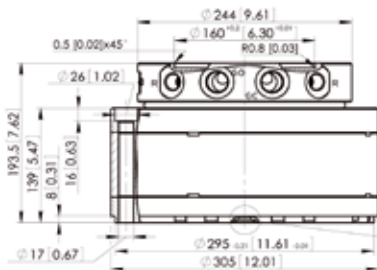

Type	GR 16S	CPR 5	CPR 9
Rotation range:	endless	endless	endless
max axial load:	16 t. / 160 kN	5 t. / 50 kN	9 t. / 90 kN
Optimal litre output:	40 l/min	30 l/min	30 l/min
Weight:	71 kg	45 kg	86 kg
Attachment:	Bolt circle Ø 173 mm Bore 6 x Ø 17 mm	Bolt circle Ø 198 mm Bore 4 x Ø 17 mm	Bolt circle Ø 270 mm Bore 8 x Ø 17 mm
max. operating pressure:	250 bar	250 bar	250 bar
Torque at 250 bar:	3400 Nm	1350 Nm	3000 Nm
			

LASCO cone splitter on mounting frame


This mounting frame can be equipped with all small cone splitter types and is also suitable for fitting log grips and rotators. The mounting frame can also be equipped with one cone splitter.

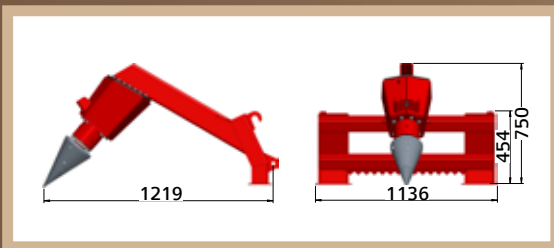

Cone splitter with attached wood grips

Since the cone splitter can bore into the wood like a corkscrew, the wood can be so easily manipulated. Smaller material such as branches, however, can only be manipulated with a wood grips. For this reason, there is the cone splitter with attached wood grips.


For this purpose, the cone splitter is additionally fitted with an electrical switching valve. Various combinations are available.

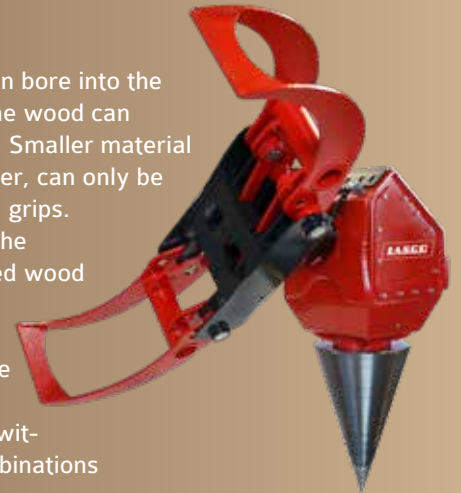

Mobile plate for the cone splitter

For years we have attached the cone splitter on the A support of log trailers. The advantage of this is that over dimensioned wood can be split directly in the forest. For those who use the cone splitter in a forest cooperative or need to change the log trailer often, there is now the mobile plate for cone splitters.

The mobile plate is intended for splitting while free-standing or weighted down with a log trailer support leg. Unlike the fixed installation, the plate with mounted cone splitter can also be lent out and is an ideal complement to a forest cooperative. Even if the log trailer needs to be changed, the mobile plate with cone splitter can continue to be used.

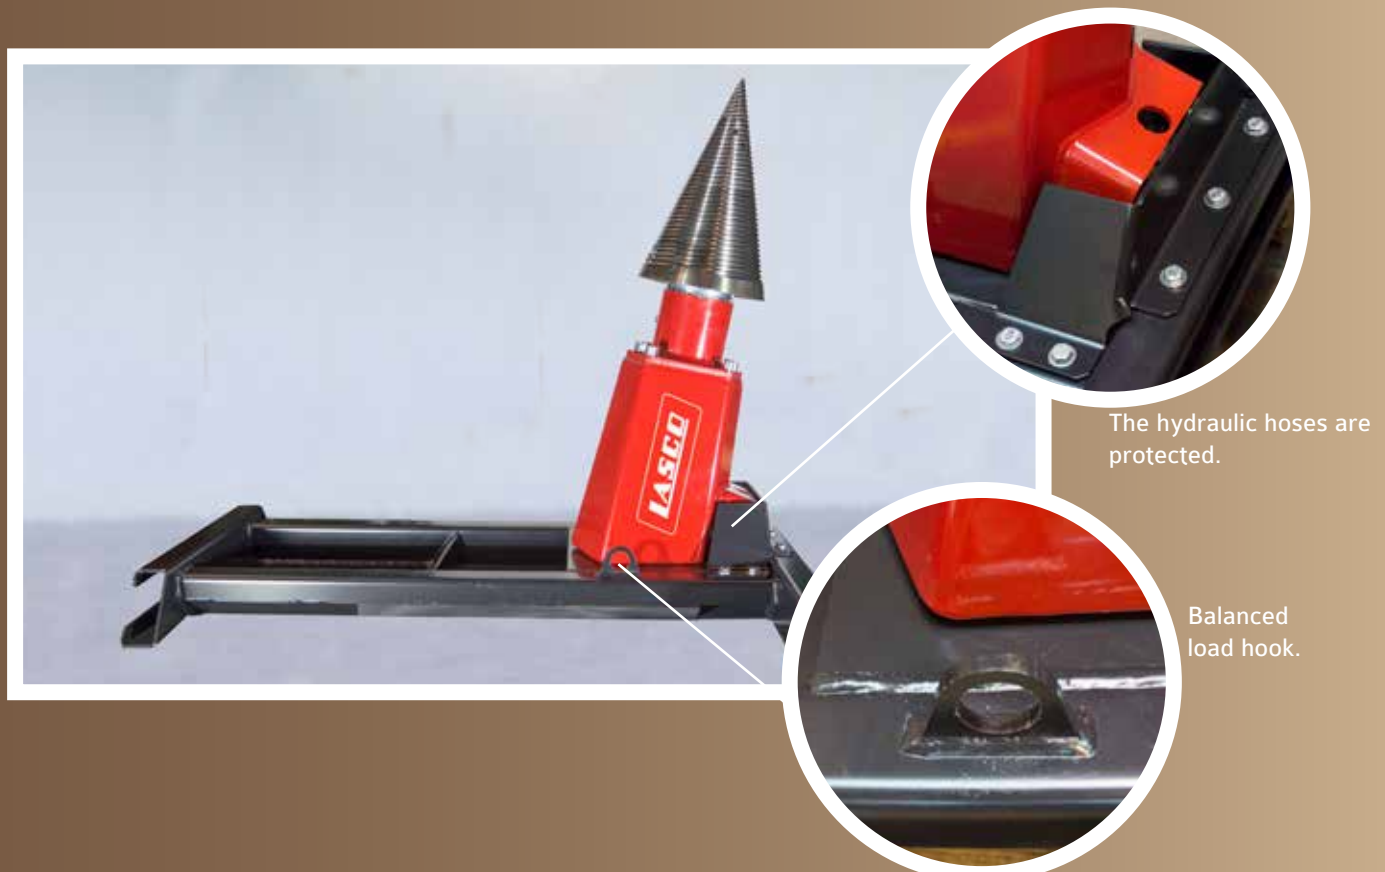


LASCO WOOD DRYING

Wood is the energy source of the future. The drier wood is fired, the higher the energy value. Thus fresh forest wood per kilo offers just a calorific value of 2 kW/h. If, however, the wood is dried to a residual moisture content of <20%, the calorific value is approx. 4 kW/h.

The low investment costs make wood drying additionally attractive. As a result, traditional systems such as drying by spontaneous heat are becoming obsolete (-2% calorific value loss per month through microorganisms).

We have developed several methods for perfectly drying even your wood.

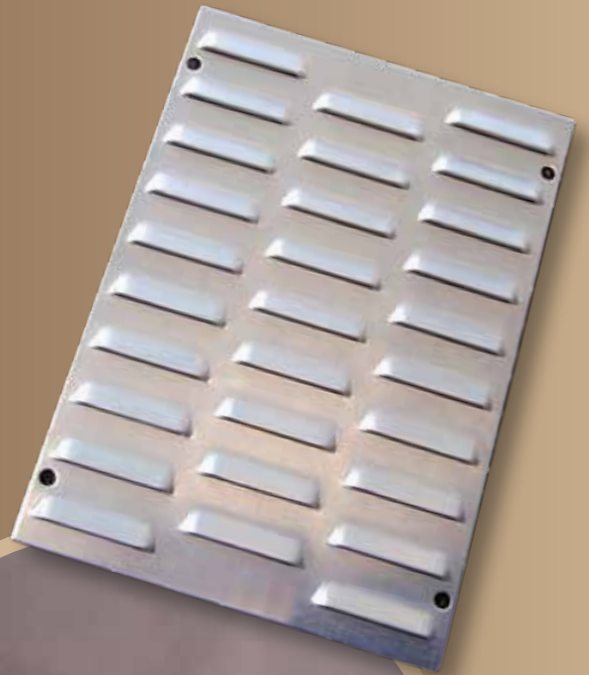

LASCO gill plate is made of 3mm galvanised sheet, is transportable and available in many variations.



Container drying - also equipped with gill plate and heated with a Landritherm LA 250 woodchip furnace.



Your local contact:



Brochure 2016 / Edition 1

All alterations, mistakes, printing and typesetting errors reserved. Pictures and drawings are schematic in nature. Technical alterations are reserved in the sense of further developments.

LASCO Heutechnik GmbH
Lascostraße 1
A-4891 Pöndorf (near Salzburg)
Telefon: +43 (0)7684 / 21666-0
Fax: +43 (0)7684 / 21666-4
E-Mail: office@lasco.at
Web: www.lasco.at
www.kegelspalter.com