


LASCO CONE WOOD SPLITTER - MASCHINES

LASCO CONE WOOD SPLITTER

Patent and trademark protected

Both small forest managers and enterprise contractors rely on this proven and stable splitting technique. Over 8000 LASCO splitters throughout Europe, Canada and the United States have already established themselves in the market bringing maximum benefit and comfort to the forestry sector.

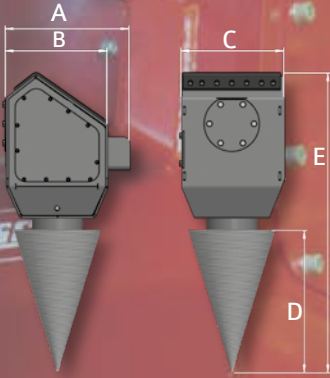

| Roli 5.2/6.2 | |
|--------------|--------|
| A: | 358 mm |
| B: | 326 mm |
| C: | 312 mm |
| D: | 340 mm |
| E: | 847 mm |

| Roli10.0 | |
|----------|--------|
| A: | 371 mm |
| B: | 325 mm |
| C: | 311 mm |
| D: | 343 mm |
| E: | 972 mm |

| Roli 10.0 K | |
|-------------|---------|
| A: | 371 mm |
| B: | 325 mm |
| C: | 311 mm |
| D: | 465 mm |
| E: | 1084 mm |



| M1 5.2/6.2K, M2 5.2/6.2k | |
|-----------------------------|---------|
| A: | 445 mm |
| B: | 345 mm |
| C: | 361 mm |
| D: | 489 mm |
| E: | 1075 mm |


| M2 5.2/6.2 KS | |
|---------------|---------|
| A: | 445 mm |
| B: | 345 mm |
| C: | 365 mm |
| D: | 644 mm |
| E: | 1147 mm |

| M2 5.2/6.2 S, M3 5.2/6.2 | |
|-----------------------------|---------|
| A: | 560 mm |
| B: | 460 mm |
| C: | 465 mm |
| D: | 644 mm |
| E: | 1356 mm |

| M2 5.2/6.2 M, M3 5.2/6.2 M | |
|-------------------------------|---------|
| A: | 575 mm |
| B: | 475 mm |
| C: | 475 mm |
| D: | 489 mm |
| E: | 1282 mm |



Extremely robust tapered barrel roller bearings Ensure maximum durability.



Cone tips can be easily replaced.

LASCO CONE WOOD SPLITTER - MASCHINES

| Model | Engine | Variant | Oil capacity | Typical application weight | Wood | | Weight |
|------------------|--------|---------|-----------------|----------------------------|--------|--------|-----------------|
| | | | | | Length | Ø | |
| 1-engined | | | | | | | |
| Roli | 6.2 | | 15 - 80 l/min | 1,3 - 5,0 to. | 200 cm | 70 cm | approx. 90 kg. |
| | 5.2 | | 15 - 80 l/min | 1,3 - 5,0 to. | 200 cm | 70 cm | approx. 90 kg. |
| | 10.0 | | 30 - 150 l/min | 2,0 - 8,0 to. | 300 cm | 90 cm | approx. 120 kg. |
| | 10.0 | K | 30 - 150 l/min | 2,0 - 8,0 to. | 300 cm | 100 cm | approx. 130 kg. |
| M1 | 6.2 | K | 15 - 80 l/min | 2,5 - 7,0 to. | 300 cm | 90 cm | approx. 135 kg. |
| | 5.2 | K | 15 - 80 l/min | 2,5 - 7,0 to. | 300 cm | 90 cm | approx. 135 kg. |
| 2-engined | | | | | | | |
| M2 | 6.2 | K | 15 - 50 l/min | 3,0 - 8,0 to. | 400 cm | 90 cm | approx. 135 kg. |
| | 5.2 | K | 15 - 50 l/min | 3,0 - 8,0 to. | 400 cm | 90 cm | approx. 135 kg. |
| | 6.2 | S | 50 - 200 l/min | 5,0 - 15,0 to. | 400 cm | 110 cm | approx. 320 kg. |
| | 5.2 | S | 50 - 200 l/min | 5,0 - 15,0 to. | 400 cm | 110 cm | approx. 320 kg. |
| 3-engined | | | | | | | |
| M3 | 6.2 | S | 150 - 300 l/min | 8,0 - 25,0 to. | 500 cm | 150 cm | approx. 400 kg. |
| | 5.2 | S | 150 - 300 l/min | 8,0 - 25,0 to. | 500 cm | 150 cm | approx. 400 kg. |
| 4-engined | | | | | | | |
| M4 | 6.2 | S XL | 200 - 400 l/min | 15,0 - 35,0 to. | 700 cm | 200 cm | approx. 600 kg. |
| | 5.2 | S XL | 200 - 400 l/min | 15,0 - 35,0 to. | 700 cm | 200 cm | approx. 600 kg. |



| Varianten | |
|-----------|---|
| Roli | Cone diameter 21cm, hexagonal rapid-change system |
| K | Cone diameter 28cm |
| S | Cone diameter 40cm |
| XL | Cone diameter 60 cm |

| Engines | |
|---------|-----------------------|
| Engine | max. working pressure |
| 10.0 | 170 - 200 bar |
| 6.2 | 170 - 220 bar |
| 5.2 | 230 - 270 bar |



LASCO

LASCO Heutechnik GmbH

Lascostraße 1
A-4891 Pöndorf

Telefon: +43 (0)7684 / 21666-0
Fax: +43 (0)7684 / 21666-4
E-Mail: office@lasco.at

www.lasco.at
www.kegelspalter.com