


LASCO CONE WOOD SPLITTER - MASCHINES

LASCO CONE WOOD SPLITTER

Patent and trademark protected

Both small forest managers and enterprise contractors rely on this proven and stable splitting technique. Over 8000 LASCO splitters throughout Europe, Canada and the United States have already established themselves in the market bringing maximum benefit and comfort to the forestry sector.

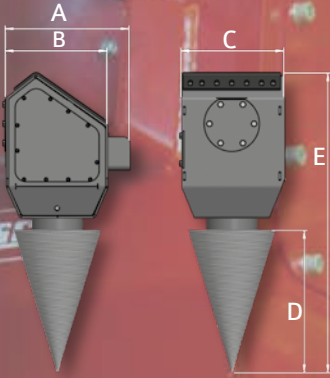

Roli 5.2/6.2	
A:	358 mm
B:	326 mm
C:	312 mm
D:	340 mm
E:	847 mm

Roli10.0	
A:	371 mm
B:	325 mm
C:	311 mm
D:	343 mm
E:	972 mm

Roli 10.0 K	
A:	371 mm
B:	325 mm
C:	311 mm
D:	465 mm
E:	1084 mm



M1 5.2/6.2K, M2 5.2/6.2k	
A:	445 mm
B:	345 mm
C:	361 mm
D:	489 mm
E:	1075 mm


M2 5.2/6.2 KS	
A:	445 mm
B:	345 mm
C:	365 mm
D:	644 mm
E:	1147 mm

M2 5.2/6.2 S, M3 5.2/6.2	
A:	560 mm
B:	460 mm
C:	465 mm
D:	644 mm
E:	1356 mm

M2 5.2/6.2 M, M3 5.2/6.2 M	
A:	575 mm
B:	475 mm
C:	475 mm
D:	489 mm
E:	1282 mm



Extremely robust tapered barrel roller bearings Ensure maximum durability.



Cone tips can be easily replaced.

LASCO CONE WOOD SPLITTER - MASCHINES

Model	Engine	Variant	Oil capacity	Typical application weight	Wood		Weight
					Length	Ø	
1-engined							
Roli	6.2		15 - 80 l/min	1,3 - 5,0 to.	200 cm	70 cm	approx. 90 kg.
	5.2		15 - 80 l/min	1,3 - 5,0 to.	200 cm	70 cm	approx. 90 kg.
	10.0		30 - 150 l/min	2,0 - 8,0 to.	300 cm	90 cm	approx. 120 kg.
	10.0	K	30 - 150 l/min	2,0 - 8,0 to.	300 cm	100 cm	approx. 130 kg.
M1	6.2	K	15 - 80 l/min	2,5 - 7,0 to.	300 cm	90 cm	approx. 135 kg.
	5.2	K	15 - 80 l/min	2,5 - 7,0 to.	300 cm	90 cm	approx. 135 kg.
2-engined							
M2	6.2	K	15 - 50 l/min	3,0 - 8,0 to.	400 cm	90 cm	approx. 135 kg.
	5.2	K	15 - 50 l/min	3,0 - 8,0 to.	400 cm	90 cm	approx. 135 kg.
	6.2	S	50 - 200 l/min	5,0 - 15,0 to.	400 cm	110 cm	approx. 320 kg.
	5.2	S	50 - 200 l/min	5,0 - 15,0 to.	400 cm	110 cm	approx. 320 kg.
3-engined							
M3	6.2	S	150 - 300 l/min	8,0 - 25,0 to.	500 cm	150 cm	approx. 400 kg.
	5.2	S	150 - 300 l/min	8,0 - 25,0 to.	500 cm	150 cm	approx. 400 kg.
4-engined							
M4	6.2	S XL	200 - 400 l/min	15,0 - 35,0 to.	700 cm	200 cm	approx. 600 kg.
	5.2	S XL	200 - 400 l/min	15,0 - 35,0 to.	700 cm	200 cm	approx. 600 kg.



Varianten	
Roli	Cone diameter 21cm, hexagonal rapid-change system
K	Cone diameter 28cm
S	Cone diameter 40cm
XL	Cone diameter 60 cm

Engines	
Engine	max. working pressure
10.0	170 - 200 bar
6.2	170 - 220 bar
5.2	230 - 270 bar



LASCO

LASCO Heutechnik GmbH

Business Location | Showroom | Sales
 Lascostraße 1
 A-4891 Pöndorf
 Telefon: +43 [0]7684 / 21666-0
 Fax: +43 [0]7684 / 21666-4
 E-Mail: office@lasco.at
 www.lasco.at
 www.kegelspalter.com

Company Headquarters
 Lasco Heutechnik GmbH
 Scherschham 14
 A-5221 Lochen am See